



# ***CANDU Safety #18: Safety Research and Development Programs***

**F. J. Doria**  
**Atomic Energy of Canada Limited**



## *Overview*

- λ Large-scale multi-channel burst tests
- λ Small-scale burst tests
- λ Loss-of-coolant accident in the Blowdown Test Facility
- λ In-cell fission-product release tests
- λ Contact boiling tests and molten material-pressure tube tests

# *★ Large Scale Multi-Channel Burst Tests (MCBT)*


- λ Test Objective: To study the effect of fuel-channel burst on in-core structures such as adjacent channels and shut-off rod guide tubes
- λ Test Facility consists of:
  - a full scale 9-channel array (3 x 3 matrix) mounted inside of a steel containment vessel
  - the burst channel contained 37-element simulated fuel bundles (actual fuel sheaths with copper pellets)
  - end-fittings and feeders mounted on the burst channel
  - target channels consisted of full-length pressure tubes and calandria tubes, garter springs, simulated fuel bundles,
  - remaining channels consisted of full-length steel tubes (to simulate pressure tube and calandria tube); simulated bundles
  - test loop consisting of a pump, water supply vessel, piping

# *MCBT Facility*

Water in Supply Vessel;  
Hot Water at 259°C to 305°C;  
Pressurized to approx. 11 MPa

Containment Vessel;  
holds the 3 x 3 channel array;  
typically central channel is ruptured


Pump

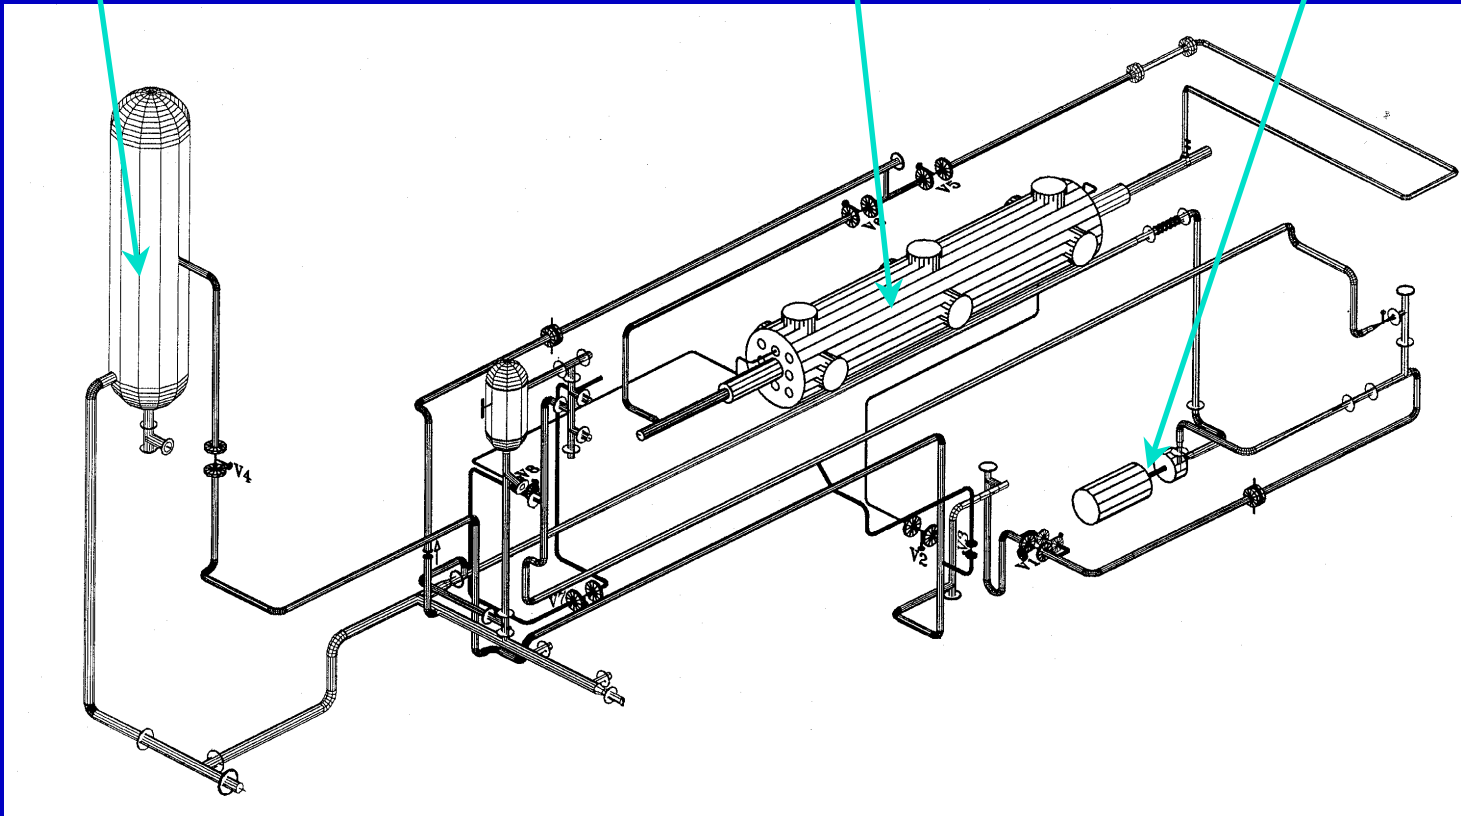

# **MCBT 3 x 3 Channel Matrix**

Shut off rod guide tubes

9 Full-length channels in a 3 x 3 matrix configuration

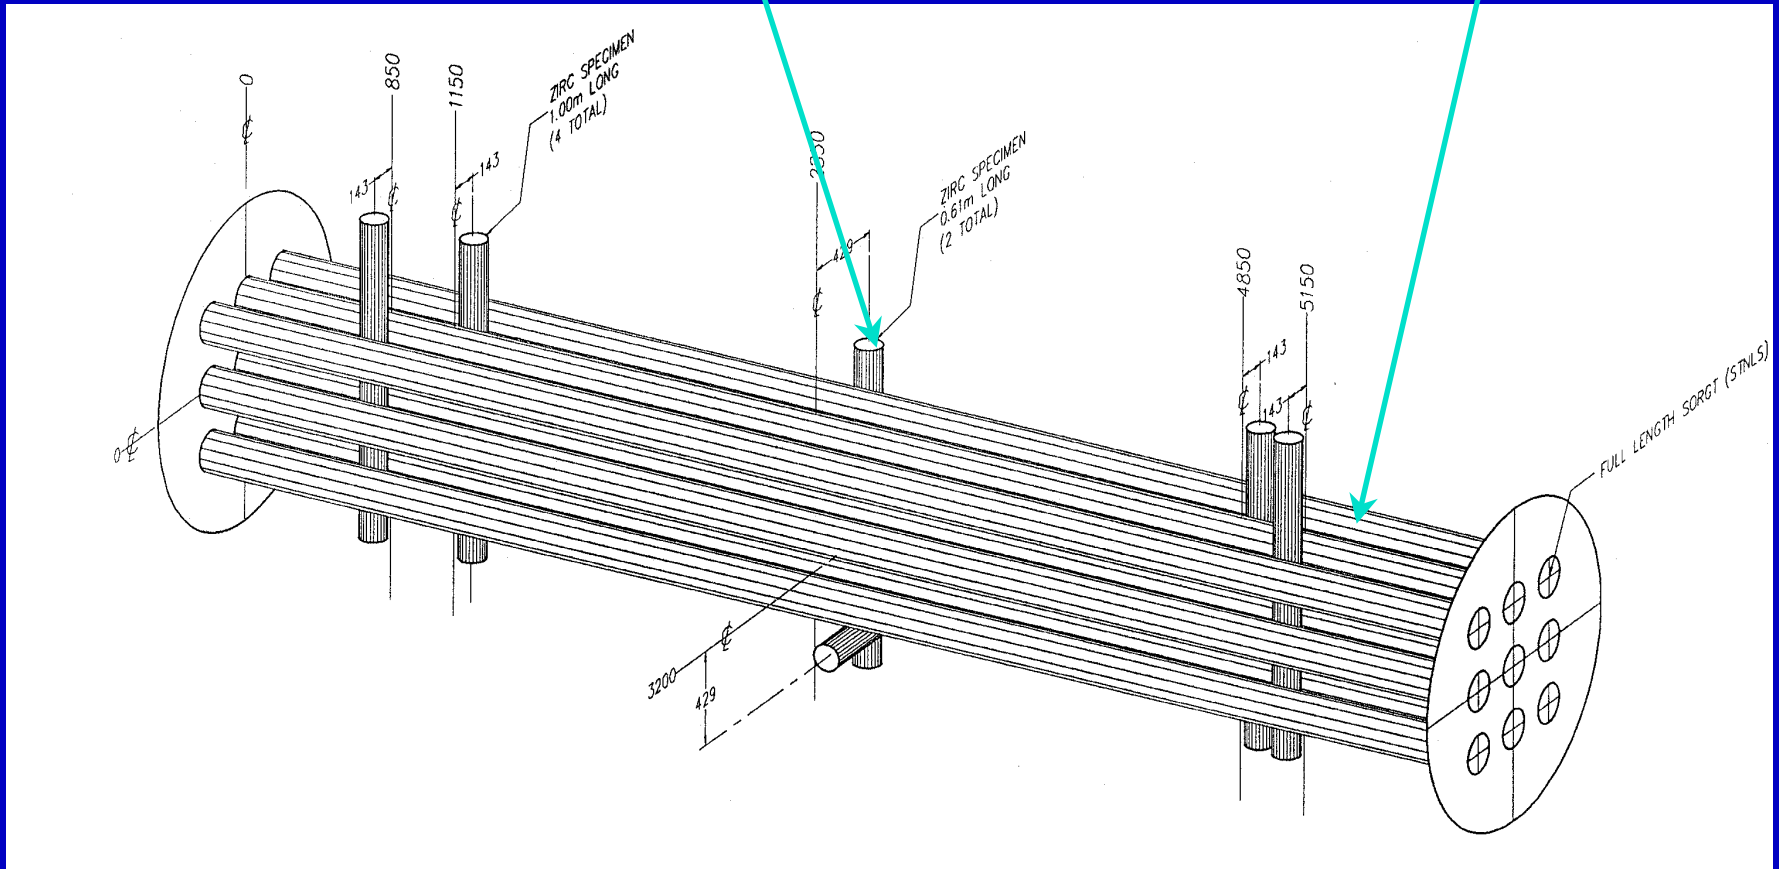

# MCBT Defect, Procedure, Instrumentation

## λ Defect

- A defect in the pressure tube and calandria tube is manufactured so that it will rupture under coolant pressure

## λ Test Procedure

- Heat the loop to the desired temperature, ranging from 259 to 296°C, and pressure 10 MPa
- Vent the pressurized annulus gas to initiate the rupture of the pressure tube

## λ Instrumentation

- pressure in containment vessel water
- strain gauges on the containment vessel
- crack-propagation gauges
- system pressures and temperatures; various other



---

## *Application of MCBT Results*

- λ Code validation: prediction of the hydrodynamic pressure in the containment vessel
- λ Address licensing safety issues (i.e., integrity of adjacent channels etc)
- λ Understanding: experiments provide insight into in-core rupture phenomena



## ***AECL Whiteshell Small-Scale Burst Tests***

### $\lambda$ Objective:

- to investigate the parameters affecting guillotine-failure of the pressure tube
- Concern: pressure tube guillotine failure may result in end-fitting ejection and subsequent loss of moderator water

### $\lambda$ Facility

- Steel containment vessel filled with water
- A fuel sheath, mounted in the centre of the vessel, with a manufactured defect
- Hot-water reservoirs to supply water to the ruptured sheath




# Whiteshell Burst Test Facility

Relief opening at top

Stainless-steel vessel

Location of Ruptured tube

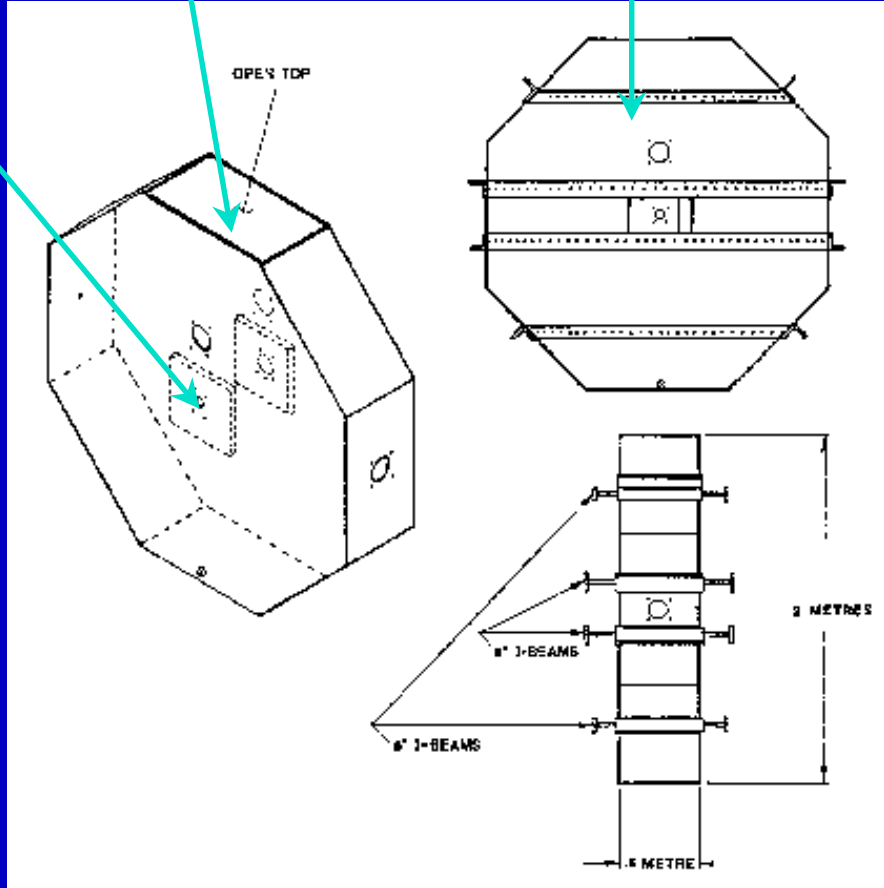



## *Variation of Several Parameters in WL Tests*

- λ Coolant burst temperature (up to approximately 300°C),
- λ Coolant burst pressure,
- λ Defect length,
- λ Surrounding water temperature,
- λ Collapsible volumes (i.e., various matrix sizes, 3x3, 5x5, 11x11 etc.),
- λ Small and large water reservoirs.




## *Various Instrumentation in WL*

### $\lambda$ Measure

- Element coolant pressure,
- Element coolant temperature,
- Water pressure in containment vessel at various locations,
- Crack extension speed,
- Bubble growth through high-speed video, and
- Vessel wall strain

# *★ Bubble Dynamics After Rupture*

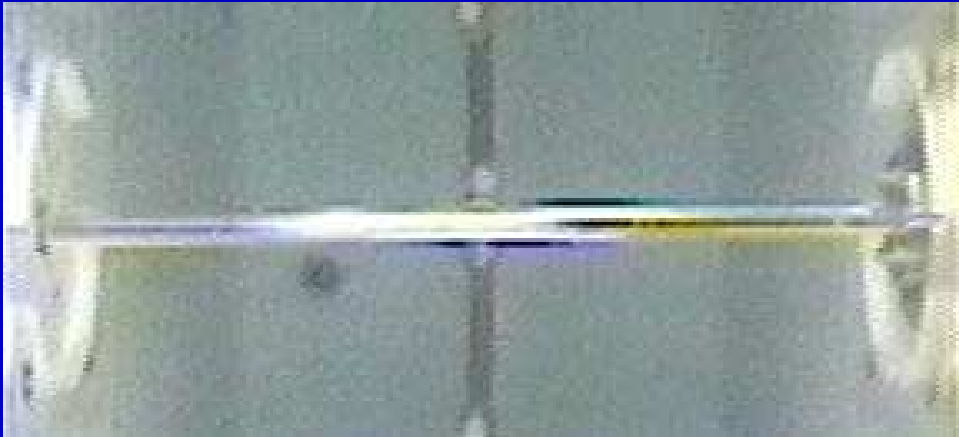




## ***Blowdown Test Facility (BTF)***


- λ Tests performed at the AECL-Chalk River Laboratories Research Reactor**
- λ Capable of simulating a loss-of-coolant accident with or without emergency core cooling**
- λ Measurements include fission product release, fuel and system temperatures**

# *BTF Test Facility*

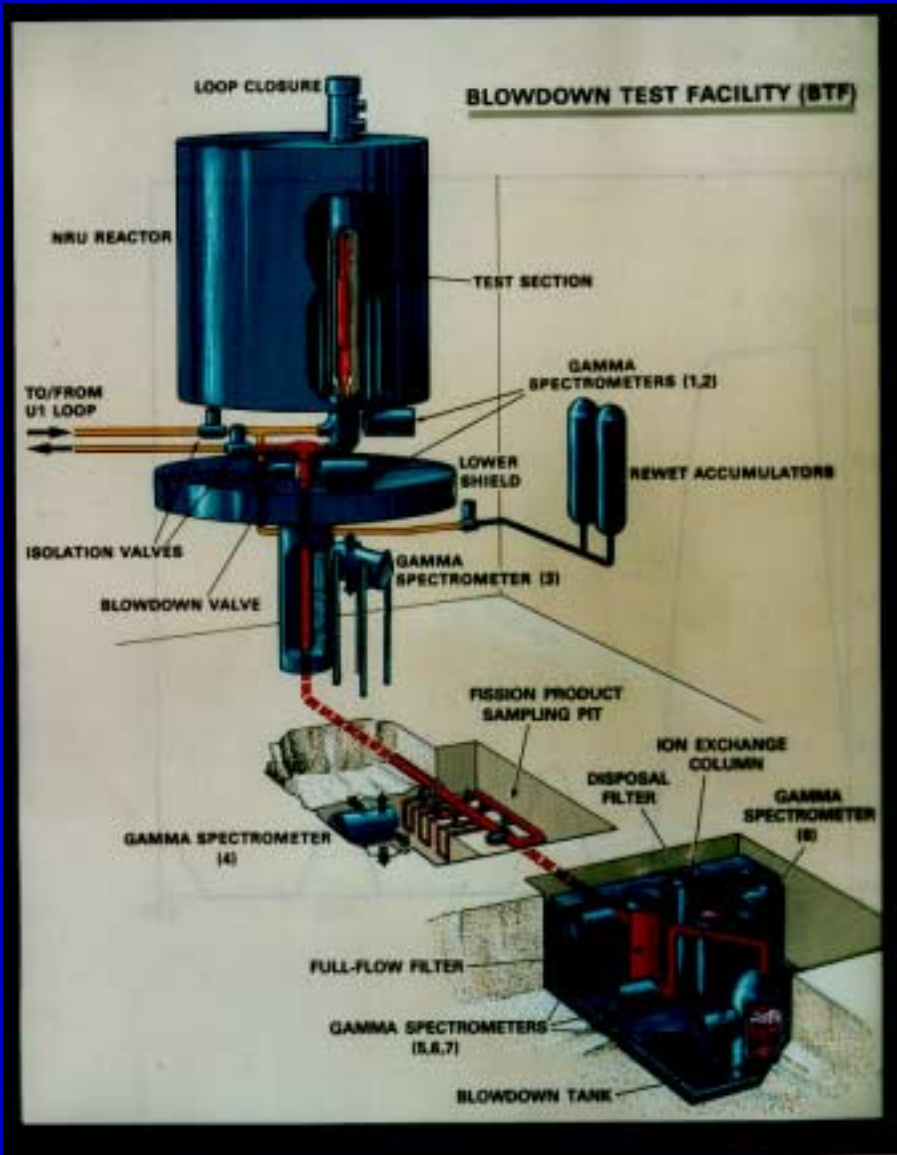



# *☆ Cross-Section of the BTF Test String*

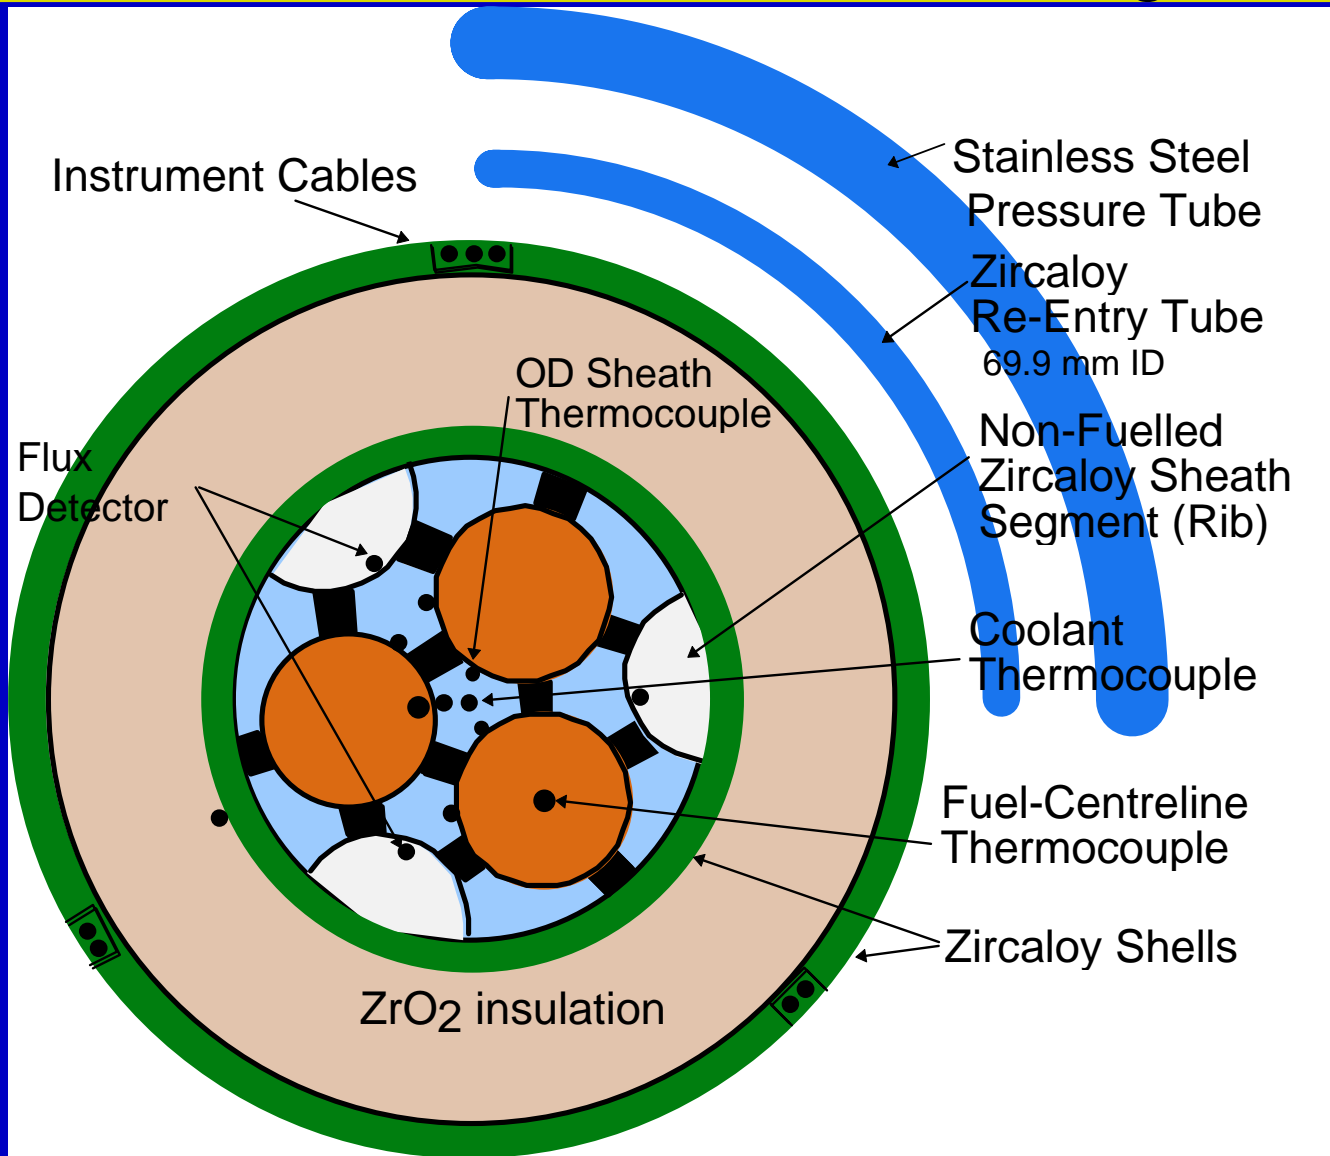




## *In-cell fission-product release tests*

- λ Objective: 1) understand fission product release under various conditions; 2) provide data for code development and validation
- λ 100's of tests performed
- λ Varied parameters include:
  - Fuel type (CANDU fuel, research reactor fuel, light water reactor fuel)
  - Fuel sample design (bare  $\text{UO}_2$  fuel fragments, fuel pellet inside a sheath)
  - Environmental conditions (inert, air, steam)
  - Various heating rates
  - Various steady state temperatures
  - Various hold times at steady state temperature




# Experiment Result

MCE2-T03 (Fragment in Argon)

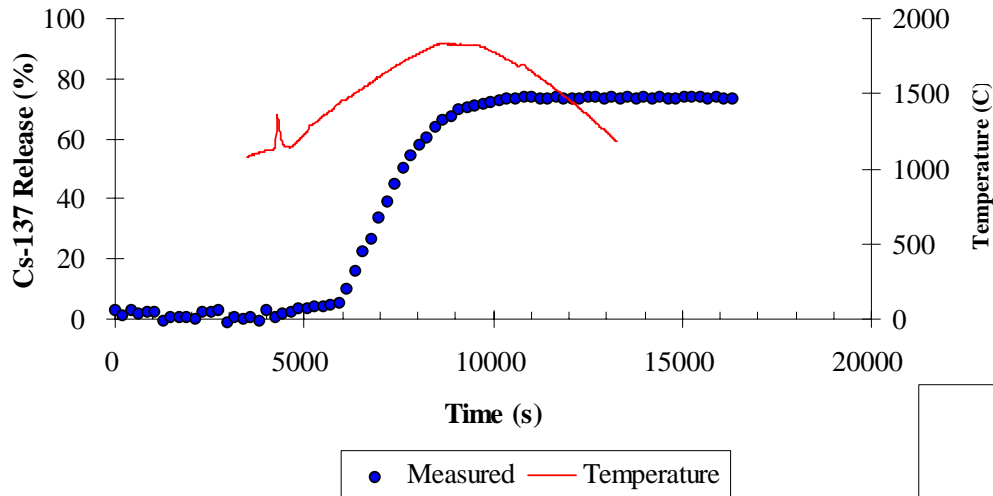

HCE2-BM5 (Mini Element exposed to Steam)

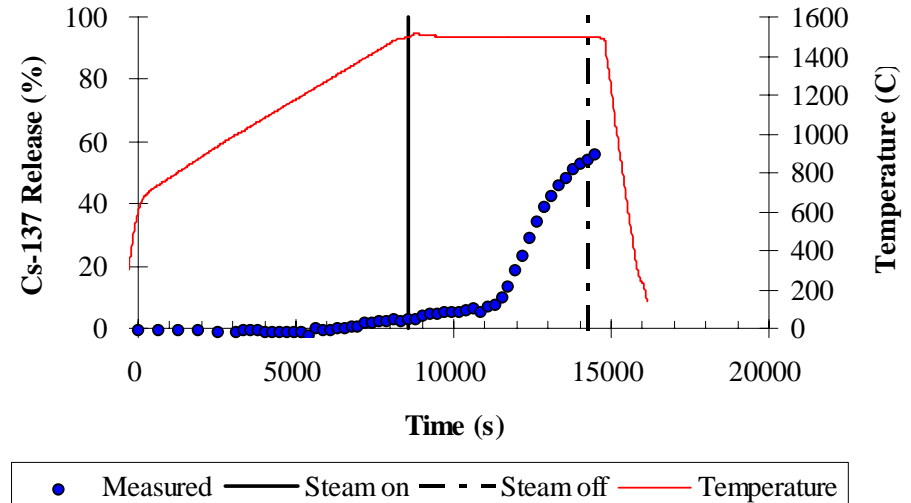


# *★ Some Channel Integrity Experiments*

---

- λ Pressure tube-calandria tube contact boiling tests
  - Objective: determined the conditions for calandria tube dryout (applied in LOCA and LOCA/LOECC analysis)
- λ Induced temperature gradient around pressure tube tests
  - Objective: determine conditions for localized pressure tube strain and potential failure of pressure tube
  - i.e., applicable for flow blockage type conditions
- λ Local hotspot on pressure tube tests
  - fuel bearing pad-pressure tube contact tests
  - fuel element-pressure tube contact tests
  - molten material falling onto inside surface of pressure tube tests

# ☆ Circumferential Temperature Gradient in PT

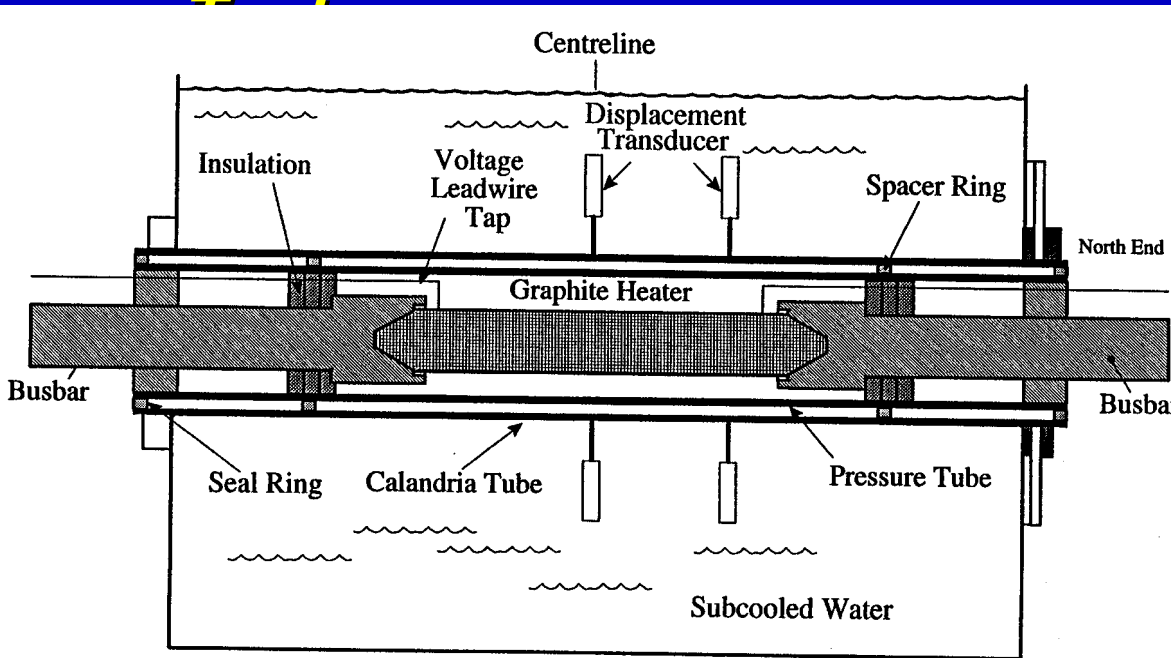

- Graphite heater used to heat up channel
- Tests induce a temperature gradient in the PT during heatup
- Internal pressure applied
- Assembly contained in cool water tank

- Non-uniform pressure tube temperature leads to non-uniform deformation
- Depending on the severity of the gradient, the pressure tube may fail due to local straining before it balloons into contact with its calandria tube



# ★ Molten-Material Contacting PT Tests

- λ Hole machined in the middle of graphite heater
- λ Zircaloy-4 ingot is machined to fit into hole
- λ Heater power increased to melt ingot
- λ Molten material drops onto PT
- λ Local PT temperatures increase rapidly
- λ Local PT deformation

Photograph of outside of failed PT

